

Stainless steel rotary vane pumps

PO 4000 series

The 4000 series rotary vane pumps, available in 7 different displacements, are the largest Rotoflow® high technology volumetric pumps. The pump housing, the rotor and every metallic component are in AISI 303 stainless steel.

The pumping chamber and the vanes are in high impact carbon graphite. The self-lubricating property of polished stainless steel and carbon graphite makes this pump well suited for water and water based solutions.



Inlet/outlet ports are 1" NPT female threaded (1" GAS available upon request). All models are available with NBR or Viton® seals. Maximum operative temperature: 70 °C (158 F).

- Max. motor speed: 1725 rpm
- Max. system pressure: 20 bar (290 psi)
(Safety valve recommended)



MAIN APPLICATIONS


- Reverse osmosis
- Car wash
- Cooling systems
- Irrigation

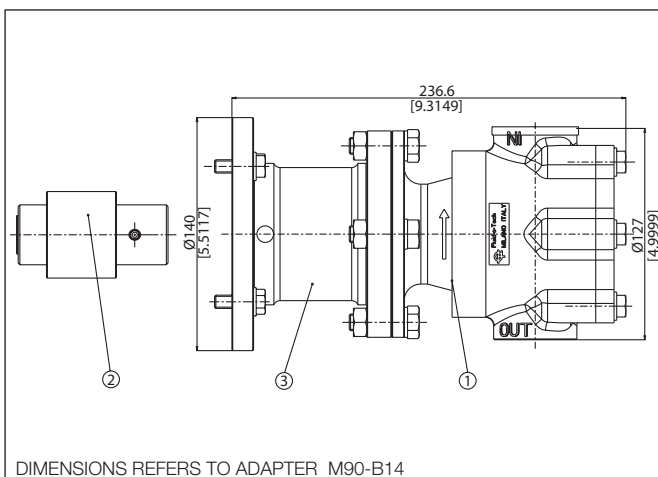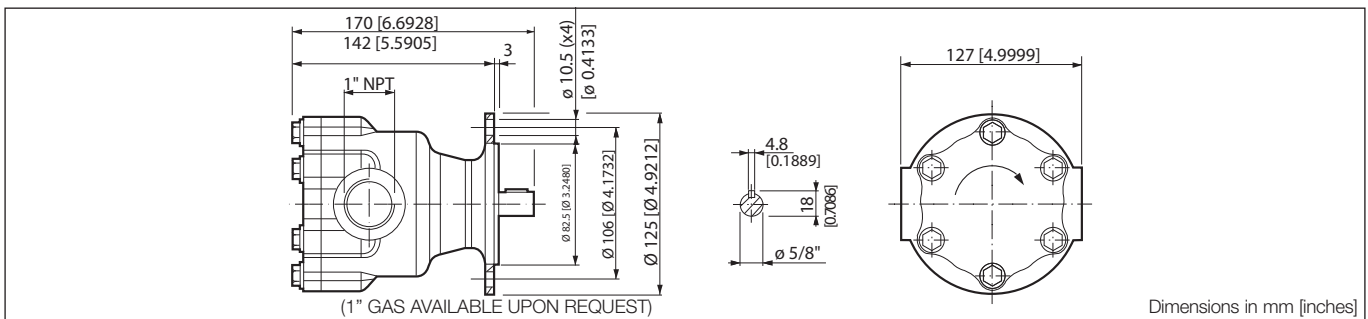

POS	DESCRIPTION	MATERIAL	CODE
1	Pump	Stainless Steel	-
2	Coupling M90	Cast Iron	91-80-03
	Coupling Nema 56C		91-80-05
	Coupling Nema 143TC-145TC		91-80-04
3	Adapter M90 B14 with screws	Aluminium	92-81-02
	Adapter Nema 56C with screws		211605
	Adapter Nema 143TC-145TC with screws		211605

Stainless steel rotary vane pumps PO 4000 series

PO MODEL	4010	4020	4040	4060	4080	4100	4120
Figure	A - A	B - B	C - C	D - D	E - E	F - F	G - G

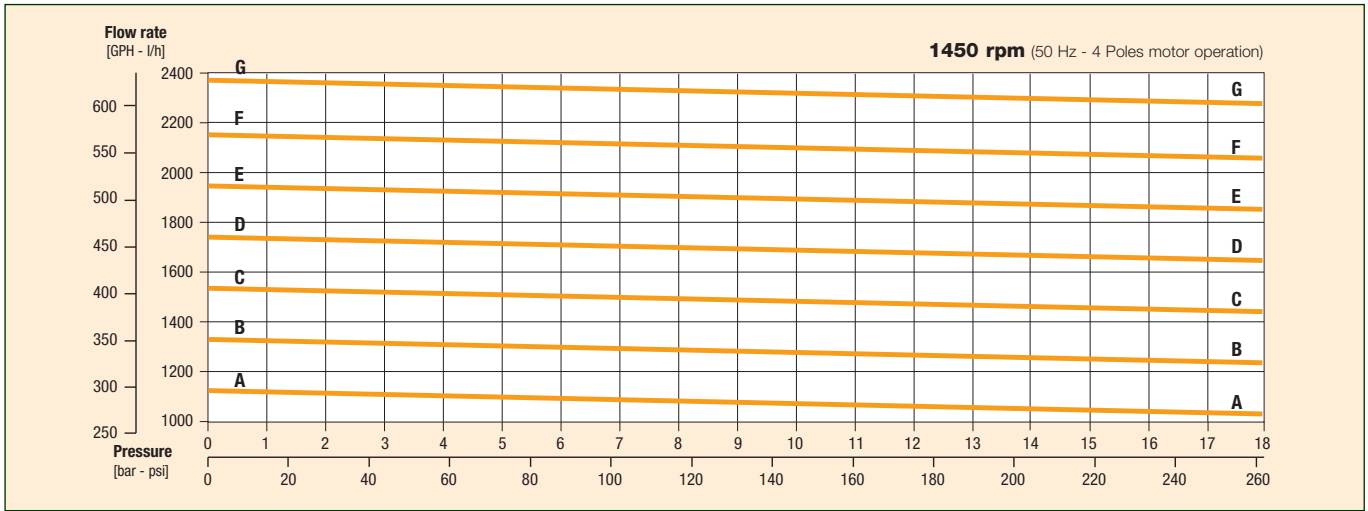

PO MODEL	4010	4020	4040	4060	4080	4100	4120
Figure	A' - A'	B' - B'	C' - C'	D' - D'	E' - E'	F' - F'	G' - G'

