



4C REPLACEMENT CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR COLD CUP
VENDING APPLICATIONS

4C Replacement Cartridge:
EV9600-00 (1-pack)
EV9601-00 (6-pack)



APPLICATIONS

- ◆ Cold Cup Vending

FEATURES • BENEFITS

- ◆ Provides clear, fresh, premium quality ingredient water for great tasting
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Exclusive submicron technology provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.5 micron in size by mechanical means
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- ◆ Does not remove fluoride
- ◆ NSF Certified under NSF/ANSI Standards 42 and 53

INSTALLATION TIPS

- ◆ Never use saddle valve for connection.
- ◆ Use $\frac{3}{8}$ " water line.
- ◆ Install vertically with cartridge hanging down.
- ◆ Allow 2 $\frac{1}{2}$ " (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush 4C cartridge by running water through filter for three (3) minutes at full flow.

OPERATION TIPS

- ◆ Replace cartridge when flow rate becomes inconveniently slow or before rated capacity is reached. It is recommended to replace cartridge at least once per year.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Service flow rate must not exceed 0.5 gpm (1.9 Lpm).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING


- ◆ Service Flow Rate: Maximum 0.5 gpm (1.9 Lpm)
- ◆ Rated Capacity: 3.000 gallons (11.355 L)

4C REPLACEMENT CARTRIDGE

EV9600-00



4C Replacement Cartridge:
EV9600-00 (1-pack)
EV9601-00 (6-pack)

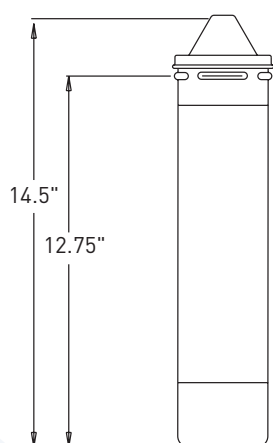

SPECIFICATIONS

- ◆ **Rated Capacity**
3.000 gallons (11.355 L)
- ◆ **Service Flow Rate**
Maximum 0.5 gpm (1.9 Lpm)
- ◆ **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar),
non-shock
- ◆ **Temperature**
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**
14.5" L x 3.25" D (36.8 cm x 8.2 cm)

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

©2022 Pentair Filtration Solutions, LLC. All Rights Reserved.

www.pentair.eu



**costruzioni
meccaniche
friulane**

D.V. srl - Depuration Vèhiculer
Via E.Ellero n.9 33080 / Cusano di Zoppola (Pn) Italy
Tel. 0039 0434 978476 / info@cmfitalia.com
info@dvsrl.com / dvsrl.com

www.cmfitalia.it