



4H CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR HOT CUP
VENDING APPLICATIONS

4H Replacement Cartridge:
EV9610-00 (1 pk)
EV9611-00 (6 pk)



APPLICATIONS

- ◆ Hot Cup Vending

FEATURES • BENEFITS

- ◆ Provides clear, fresh, premium quality ingredient water for great tasting hot beverages
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Exclusive precoat filtration provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.5 micron in size by mechanical means
- ◆ Saves energy by reducing scale build-up; proportioned scale inhibitor feed dramatically prevents limescale from forming in equipment
- ◆ Everpure's unique filter blend using activated carbon reduces chlorine taste & odor and other offensive contaminants
- ◆ Engineered to always feed the correct amount of scale inhibitor into each volume of water
- ◆ Does not remove fluoride
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means

INSTALLATION TIPS

- ◆ Never use saddle valve for connection.
- ◆ Use 3/8" water line.
- ◆ Install vertically with cartridge hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush 4H cartridge by running water through filter for three (3) minutes at full flow.

OPERATION TIPS

- ◆ Change cartridges on a regular six (6) month preventative maintenance program.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Service flow rate must not exceed 0.5 gpm (1.9 Lpm).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING


- ◆ Service Flow Rate: Maximum 0.5 gpm (1.9 Lpm)
- ◆ Rated Capacity: 1,500 gallons (5,678 L)

4H CARTRIDGE

EV9610-00



4H Replacement Cartridge:
EV9610-00 (1 pk)
EV9611-00 (6 pk)

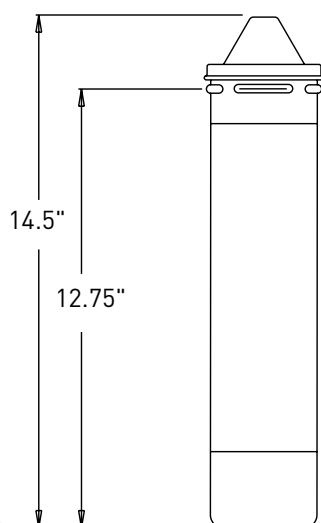

SPECIFICATIONS

- ◆ **Service Flow Rate**
Maximum 0.5 gpm (1.9 Lpm)
- ◆ **Rated Capacity**
1.500 gallons (5.678 L)
- ◆ **Pressure Requirements**
10 - 125 psi (0.7 - 8.6 bar), non-shock
- ◆ **Temperature**
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**
14.5" L x 3.25" D (36.8 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

Mechanical Filtration
Nominal Particulate, Class I

STANDARD NO. 53 – HEALTH EFFECTS

Mechanical Filtration
Cyst Reduction

EPA No. 002623-IL-002

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

EV9610-00 JL15 ©2021 Pentair Filtration Solutions, LLC. All Rights Reserved.

www.pentair.eu



costruzioni
meccaniche
friulane

D.V. srl - Depuration Vèhiculer
Via E.Ellero n.9 33080 / Cusano di Zoppola (Pn) Italy
Tel. 0039 0434 978476 / info@cmfitalia.com
info@dvsrl.com / dvsrl.com

www.cmfitalia.it